

FIGURE. 1A

100

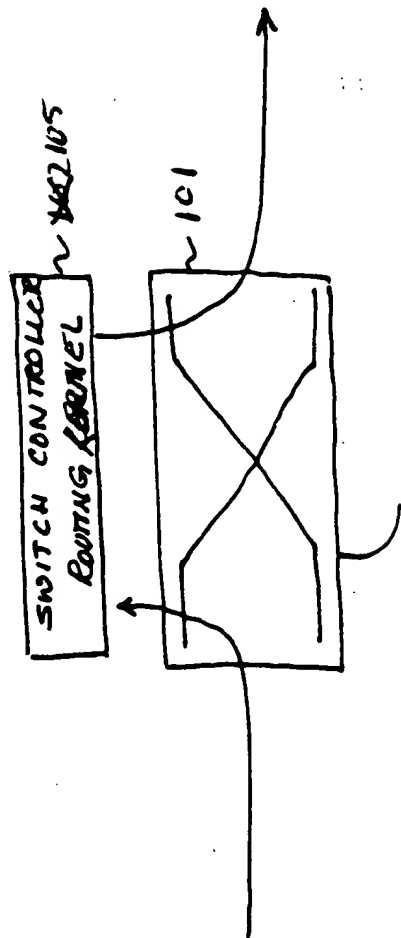


FIG. 1B is a schematic diagram of a system architecture showing a central processing unit (104) connected to two sets of I/O ports (102a, 102b, 102c and 103a, 103b, 103c) via a network of lines (106a, 106b, 106c, 106d, 106e, 106f). The I/O ports are labeled as (I/O PORTS) CARDS.

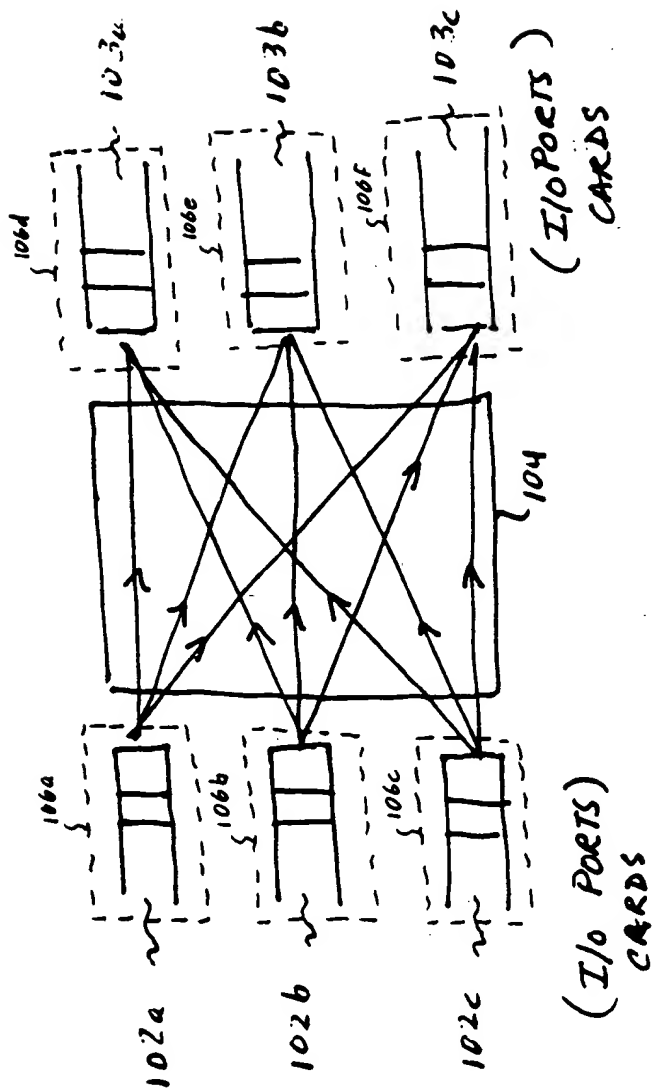


FIG. 1B

2/17

3/17

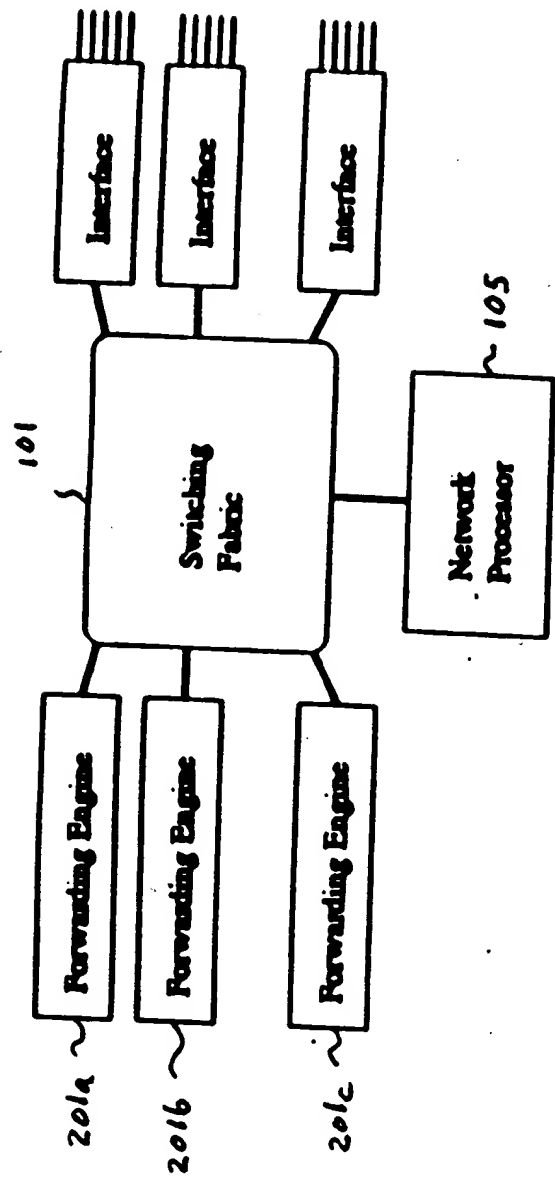


FIG. 2A

4/17

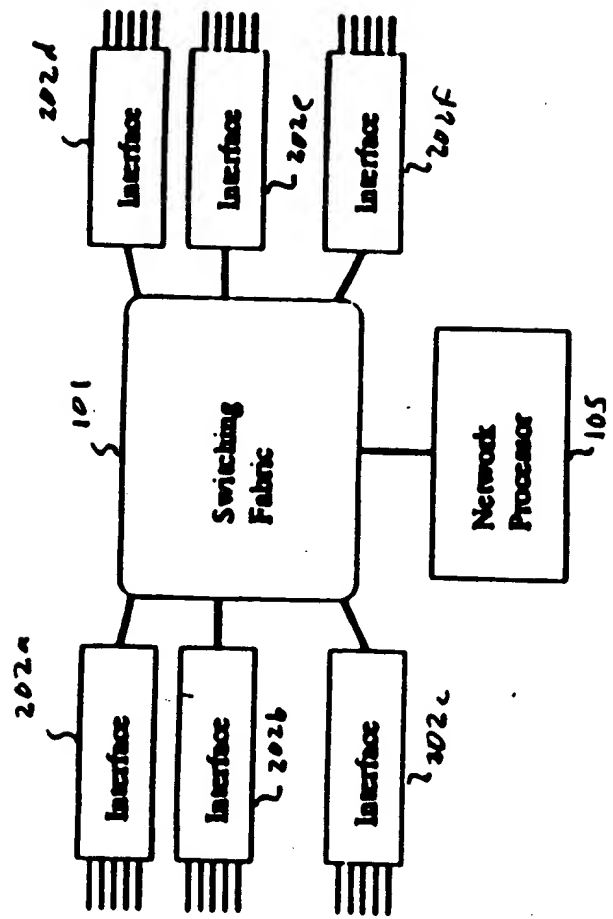


Figure 2B

5/17

FIGURE 3.

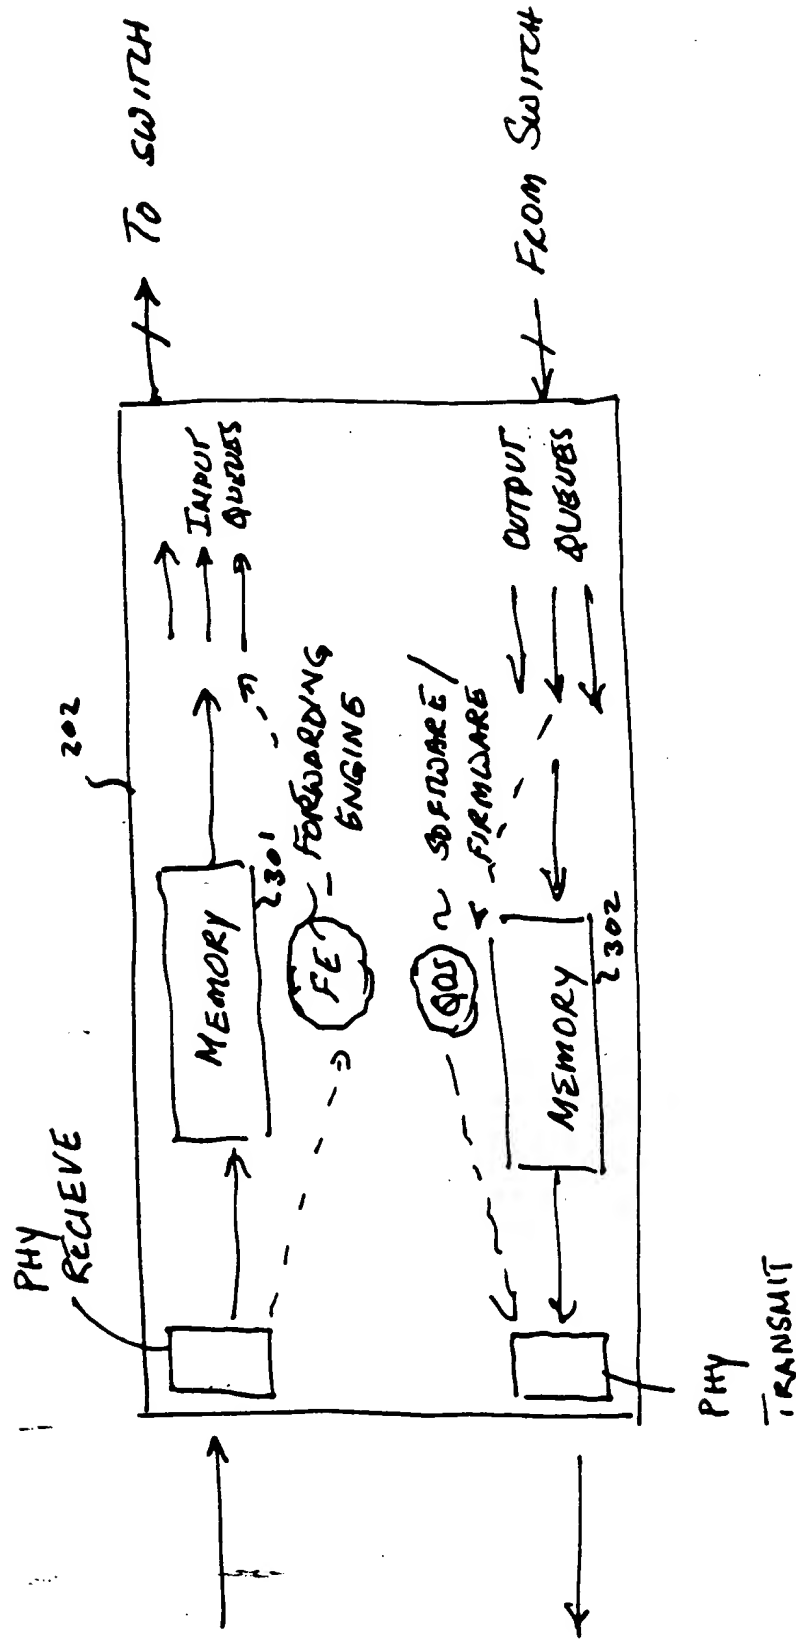


FIGURE 4A

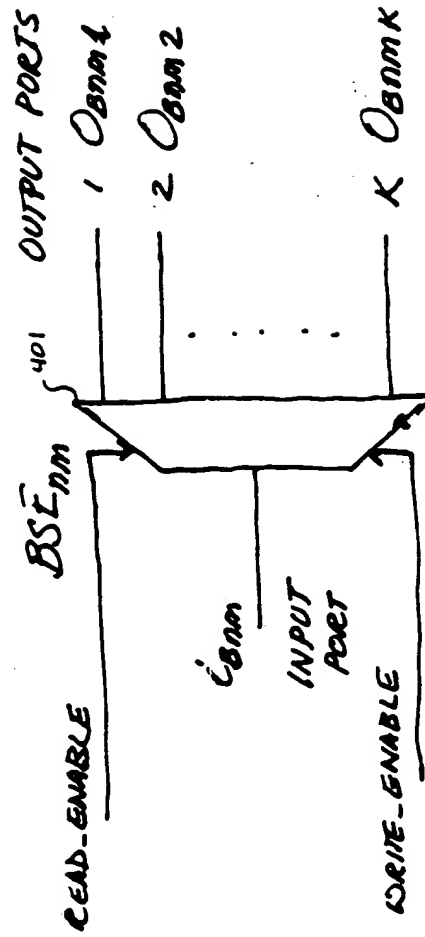


FIGURE 4B


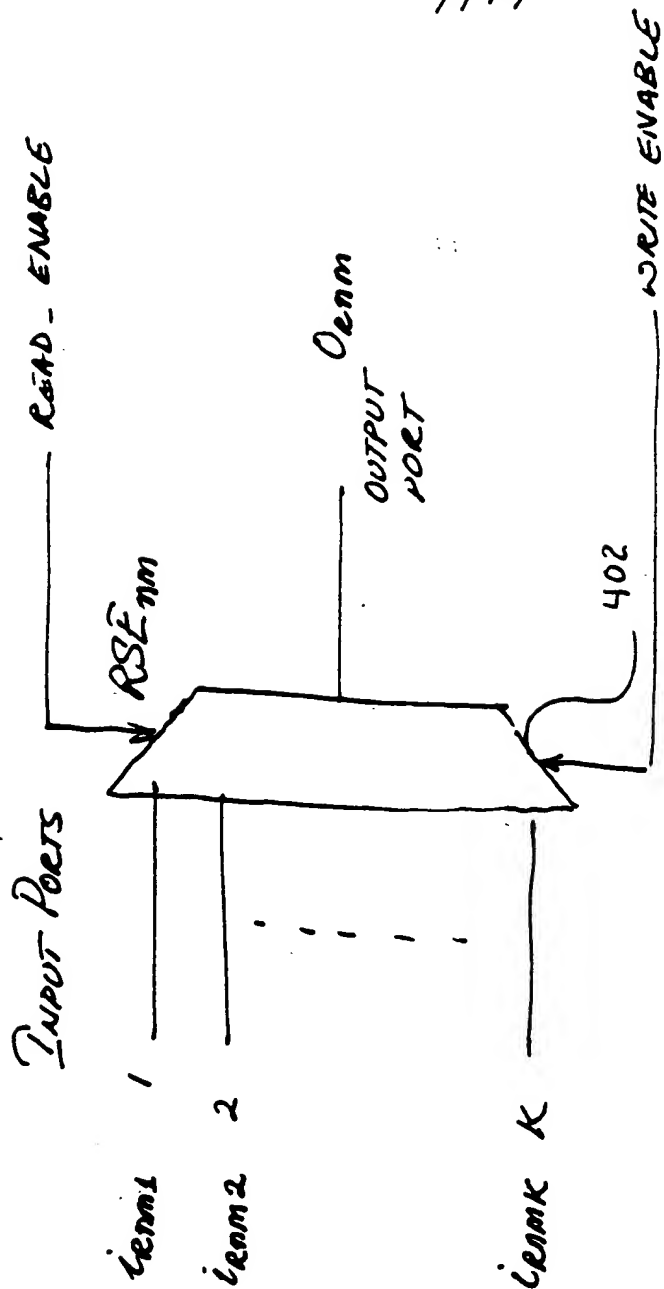


FIG. 5A is a schematic diagram of a memory array structure. The diagram shows a cross-section of the array with various layers and components labeled. The layers are labeled 401, 501, 502a, 502b, 502c, 502d, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600. The components are labeled 401, 501, 502a, 502b, 502c, 502d, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600. The diagram is a schematic of a memory array structure, showing a cross-section of the array with various layers and components labeled. The layers are labeled 401, 501, 502a, 502b, 502c, 502d, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600. The components are labeled 401, 501, 502a, 502b, 502c, 502d, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600.


FIGURE 5A

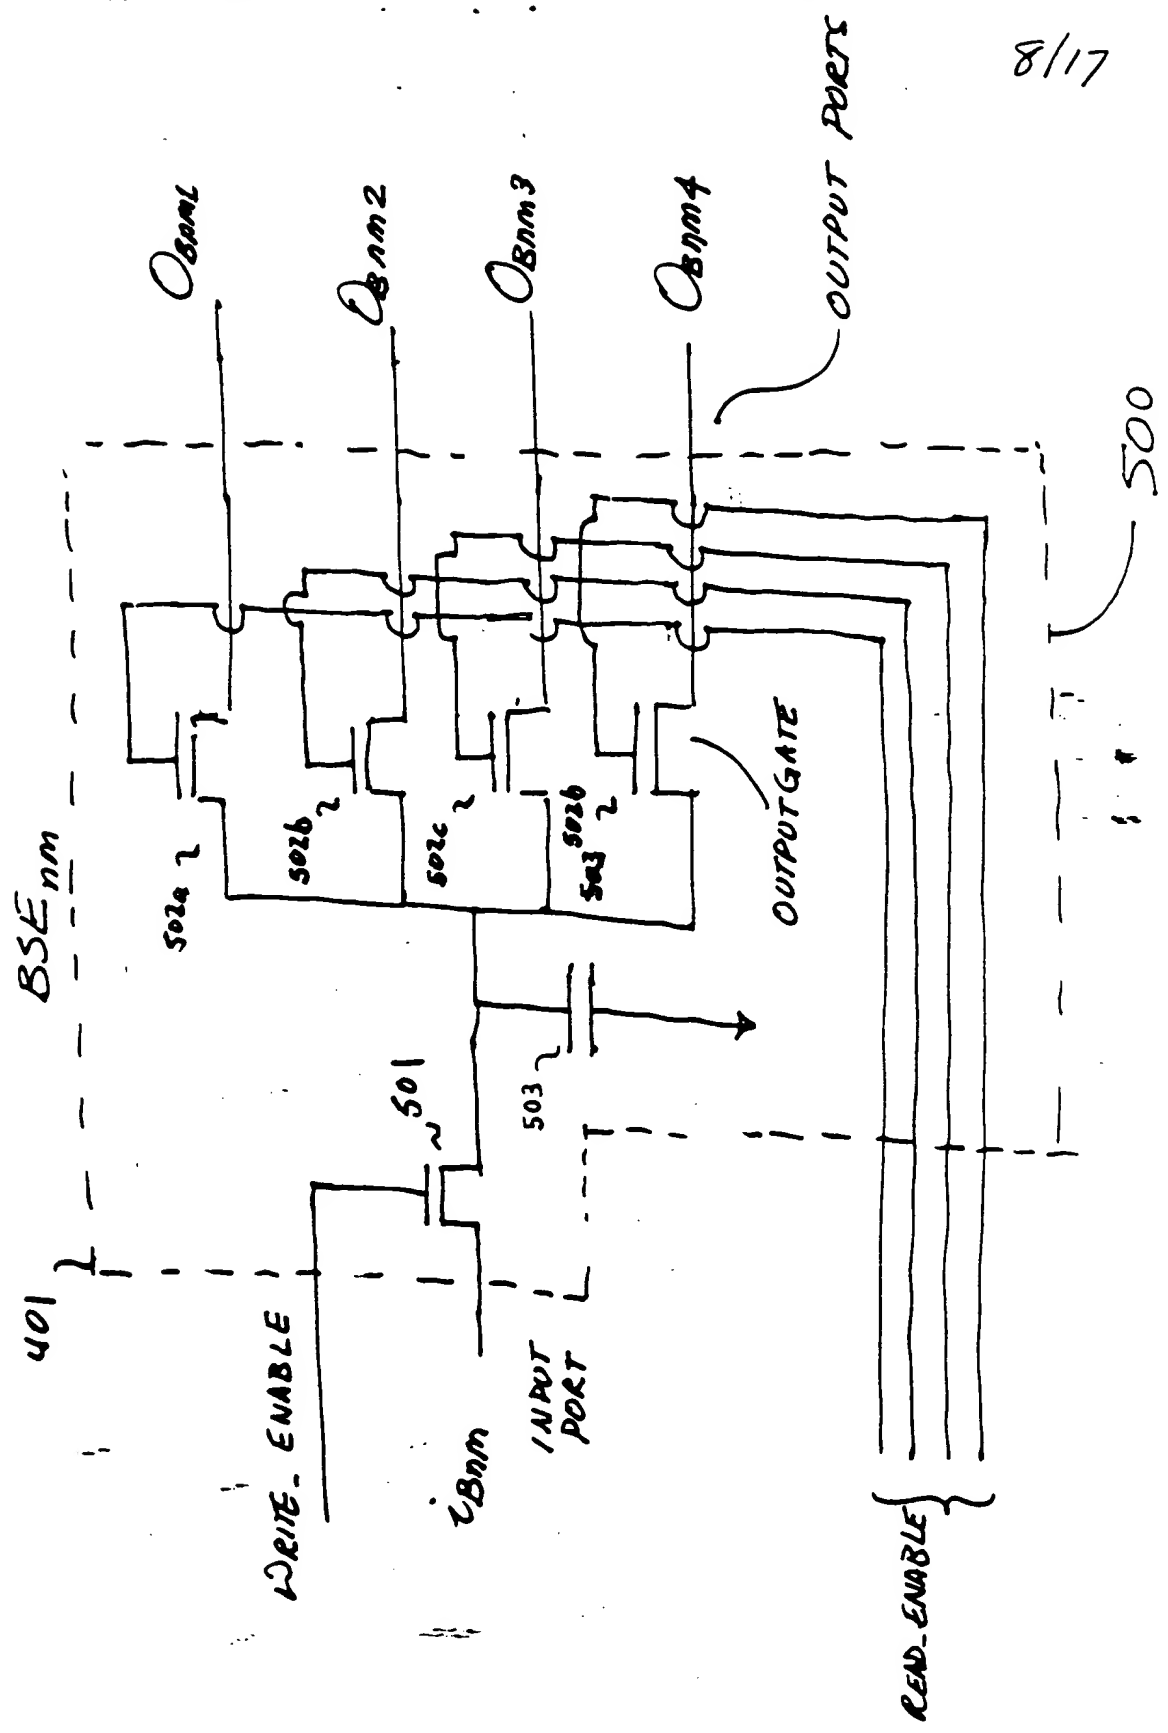

8/17




FIGURE 5B

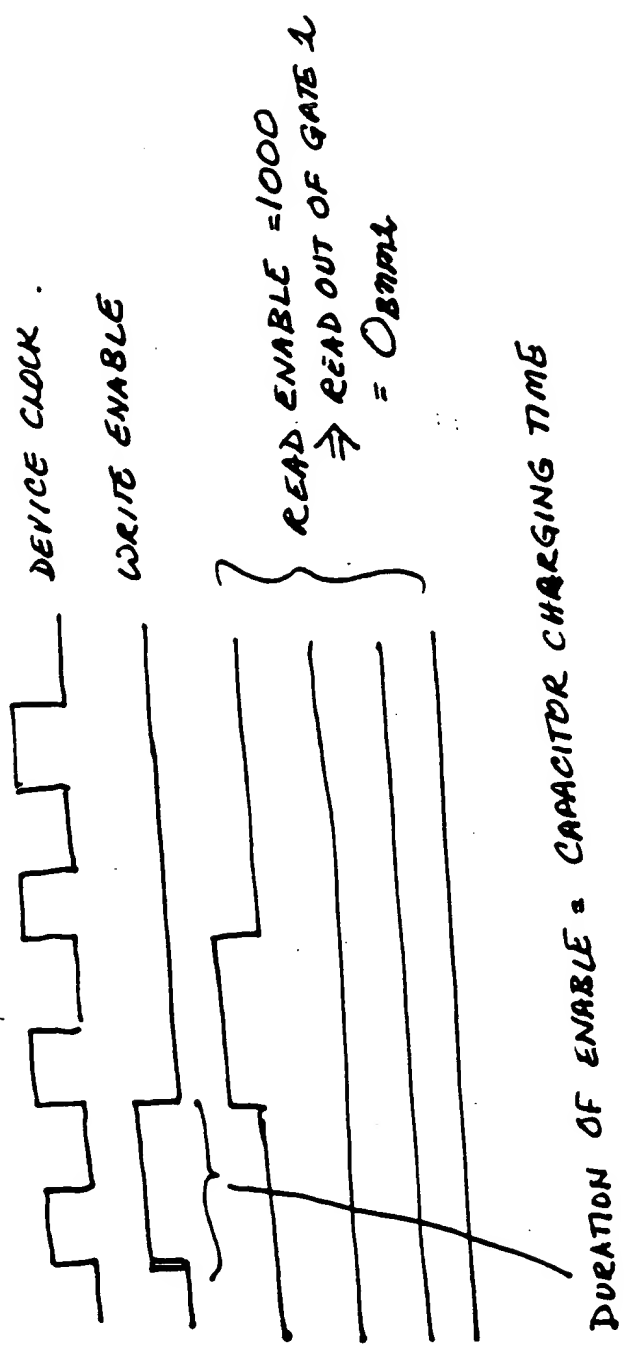

9/17


FIGURE 6A

INPUT PORTS

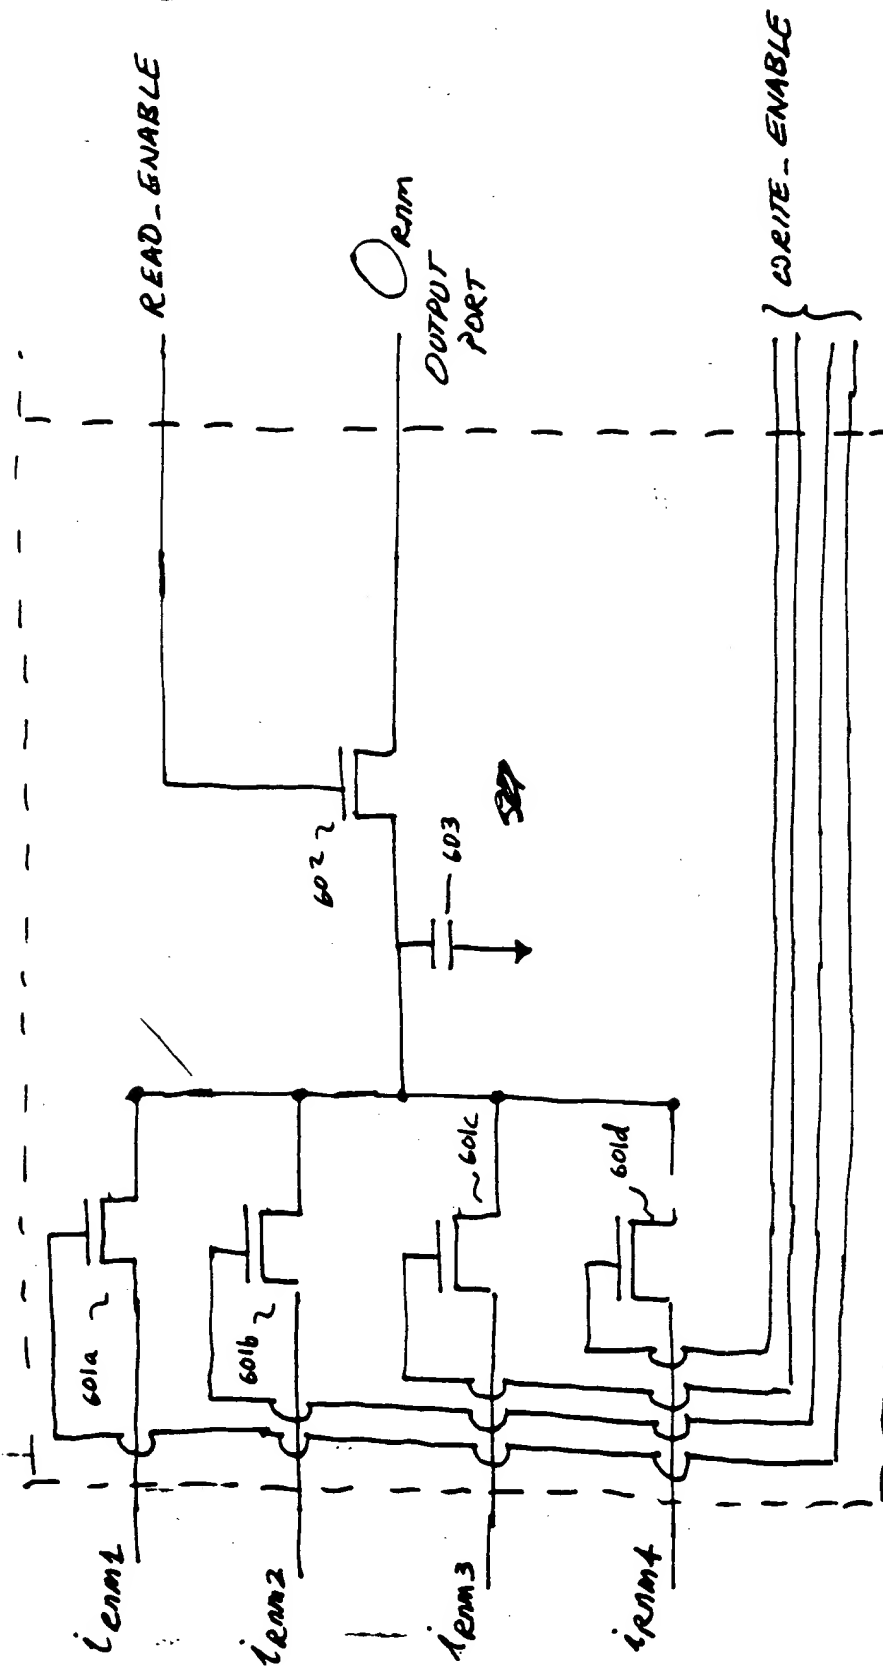

10/17

Figure 6B

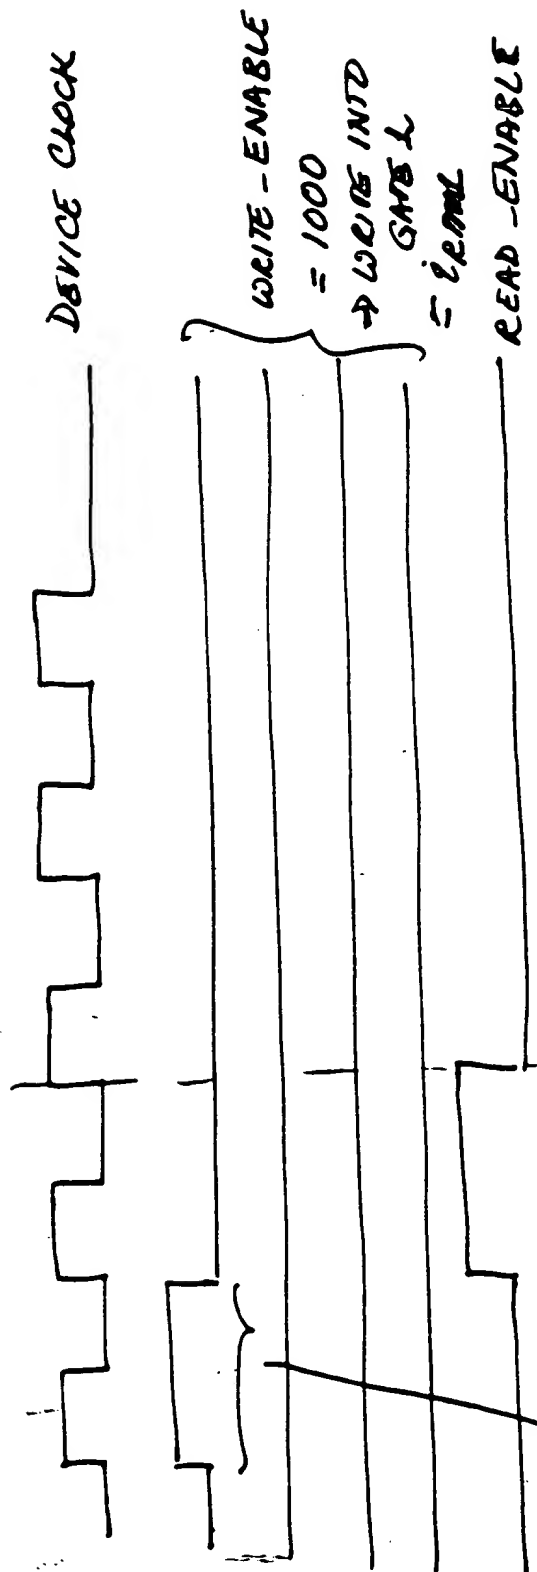

DURATION OF ENABLE = CAPACITOR CHARGING TIME

11/17

FIG. 7

12/17


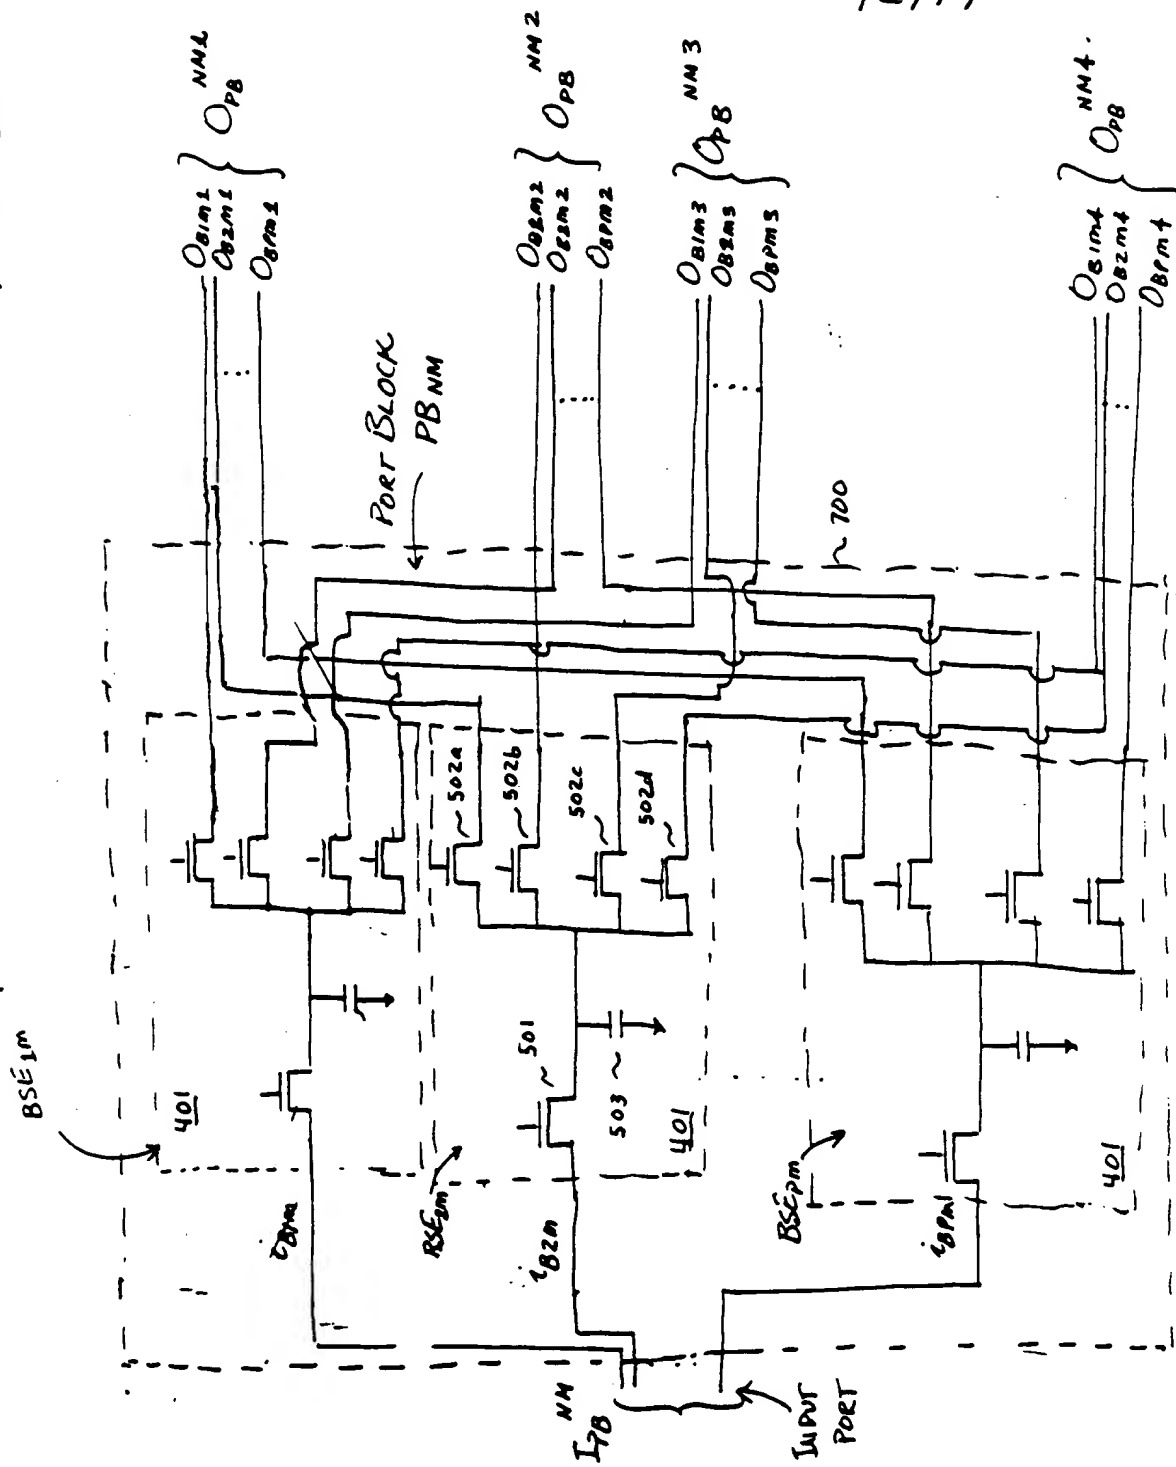


FIGURE 8

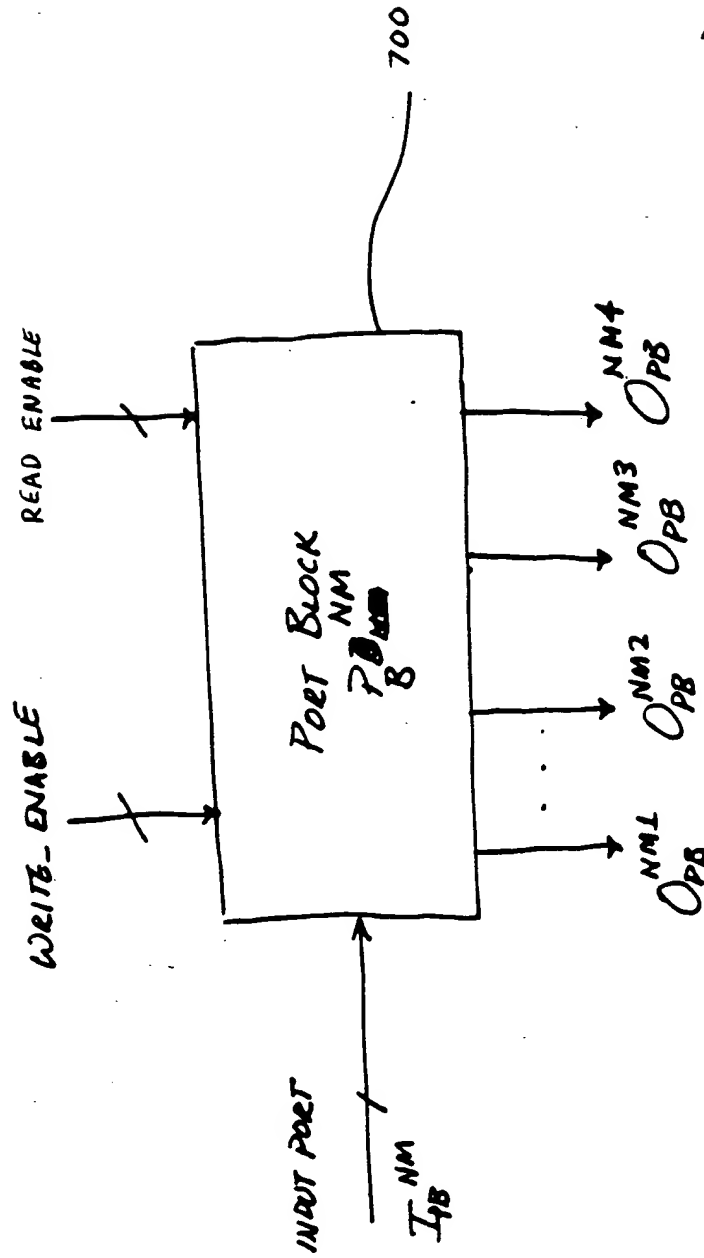

14/17

FIGURE 9.

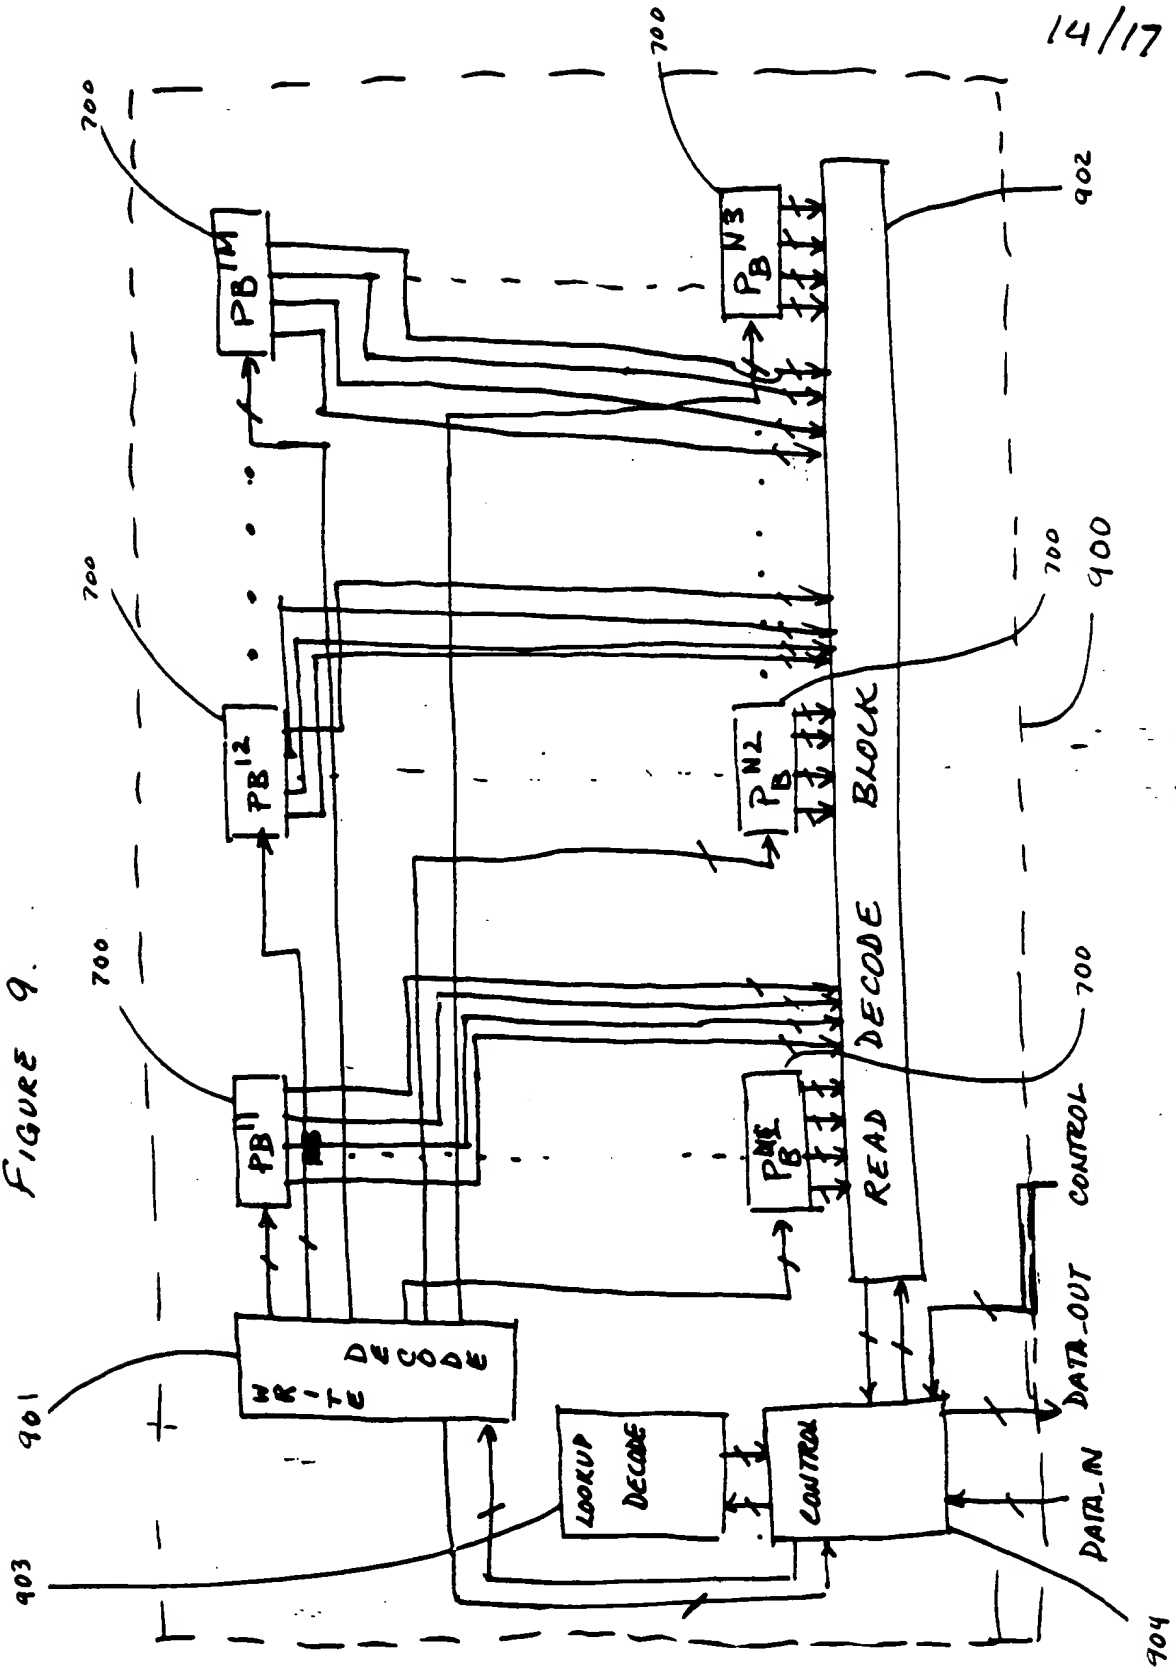
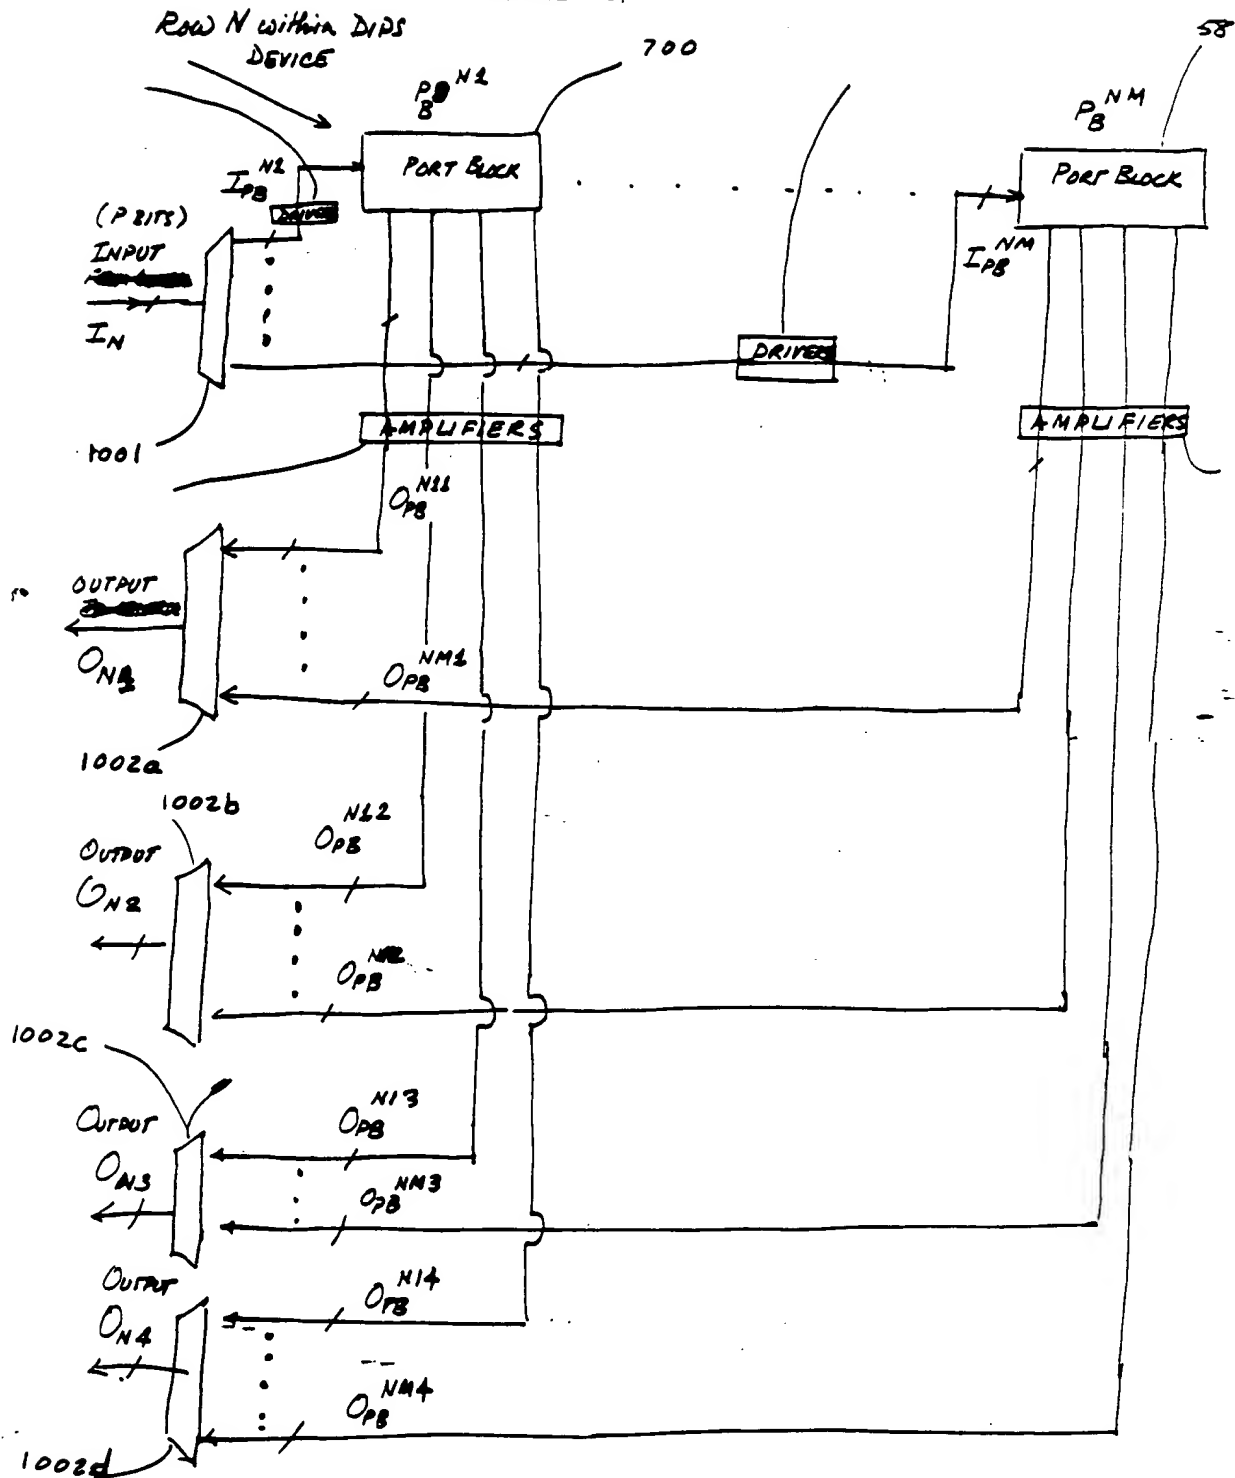


FIGURE 10.







FIGURE 11B

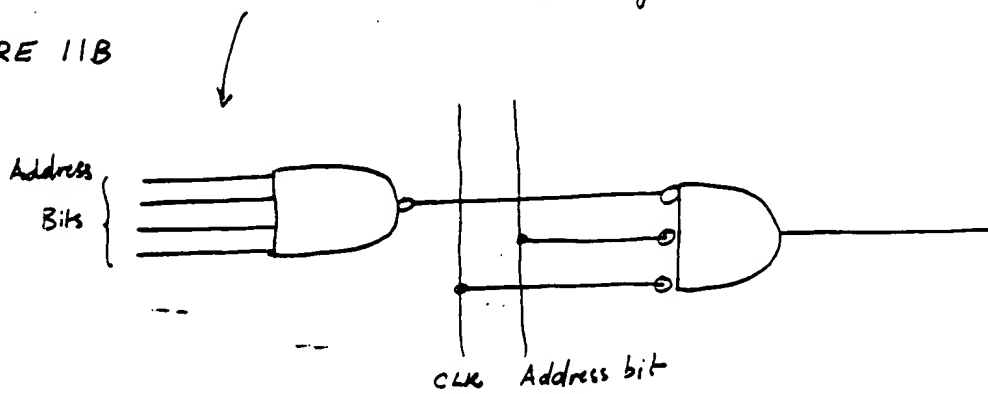

Possible implementation of decode.



FIGURE 2.

17/17

